


# AC316-OD 5 MP EXIR Vandal Resistant Dome Camera

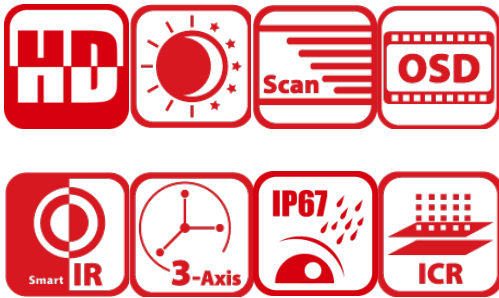

## Key Features

- 5 megapixel high-performance CMOS
- HD analog output, up to 5 MP resolution
- 2.8mm, 3.6mm fixed lens
- True Day/Night
- OSD menu, DNR, Smart IR
- EXIR technology, up to 20m IR distance
- IP67, IK10
- Up the Coax(HIKVISION-C)

## Specifications

<b>Camera</b>	
Image Sensor	5 MP CMOS image sensor
Effective Pixels	2592(H) × 1944(V)
Min. illumination	Color: 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	PAL: 1/25s to 1/50,000s NTSC: 1/30 s to 1/50,000 s
Lens	2.8mm, 3.6mm fixed lens
Horizontal Field of View	102° (2.8mm), 82°(3.6mm)
Lens Mount	Φ14
Day & Night	ICR
Angle Adjustment	Pan: 0° to 340°; Tilt: 0° to 75°; Rotate: 0° to 355°
Synchronization	Internal synchronization
Video Frame Rate	2592 × 1944@ 20fps
HD Video Output	1 HD analog output
<b>Menu</b>	
AGC	Support
D/N Mode	Auto/Color/BW(Black and White)
White Balance	ATW/MWB
BLC	Support
Language	English, Chinese
Functions	Brightness, Sharpness, Digital noise reduction, Mirror, Bad pixel correction, Smart IR
<b>General</b>	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ± 20%
Power Consumption	Max. 7.5W
Protection Level	IP67, IK10
IR Range	Up to 20m
Communication	Up the coax, Protocol: HIKVISION-C(TVI output)
Dimensions	3.58" × 2.69"
Weight	Approx. 2 lb.