

NR710 Series NVR



Features and Functions

Professional and Reliable

- Dual-OS design to ensure high reliability of system running
- ANR technology to enhance the storage reliability when the network is disconnected

Video Input and Transmission

- Up to 64-ch 12 MP IP cameras can be connected
- Connectable to the third-party network cameras

Compression and Recording

- H.264+ compression effectively reduces the storage space and costs by up to 50%
- Full channel recording at up to 12MP resolution

HD Video Output

- HDMI1/VGA1 and HDMI2/VGA2 outputs provided
- HDMI1 Video output at up to 4K (3840 × 2160) resolution

Storage and Playback

- Up to 8 SATA interfaces and 1 eSATA interface connectable for recording and backup
- Smart search for efficient playback
- 16-ch synchronous playback at up to 1080p resolution

Smart &POS Function

- Supports multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Supports VCA search for fire/ship/temperature/temperature difference detection triggered video files
- POS information overlay on live view and playback
- POS triggered recording and alarm


Network & Ethernet Access

- Cloud P2P for easy network management
- 2 Gigabit Ethernet network interfaces

Specifications

Model		NR710-32	NR710-64
Video/Audio input	IP video input	32-ch Up to 12 MP resolution	64-ch
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)	
Network	Incoming bandwidth	320 Mbps or 200 Mbps (when RAID is enabled)	
	Outgoing bandwidth	256 Mbps, or 200 Mbps (when RAID is enabled)	
	Remote connection	128	
Video/Audio output	Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF /2CIF/CIF/QCIF	
	CVBS output (Optional)	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
	VGA1 /HDMI1 output resolution	HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA1: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	VGA2 /HDMI2 output resolution	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Audio output	2-ch, RCA (2.0Vp-p, 1 KΩ)	
Decoding	Decoding format	H.265+/H.265/H.264/H.264+/MPEG4	
	Live view/Playback resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF /2CIF/CIF/QCIF	
	Synchronous playback	16-ch	
	Capability	12-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps)	
Network management	Network protocols	TCP/IP, DHCP, HIK Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS	
Hard disk	SATA	8 SATA interfaces for 8HDDs	
	eSATA	1 eSATA interface	
	Capacity	Up to 6TB capacity for each HDD	
External interface	Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface	
	Serial interface	RS-232; RS-485; Keyboard	
	USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0	
	Alarm in/out	16/4	
General	Power supply	100 to 240 VAC, 50 to 60 Hz	
	Max. Power	200 W	
	Consumption (without HDD)	≤ 30 W	
	Working temperature	-10 to +55 °C (+14 to +131° F)	
	Working humidity	10% to 90%	
	Chassis	19-inch rack-mounted 2U chassis	
	Dimensions(W × D × H)	445 × 470 × 90 mm (17.5"× 18.5" × 3.5")	
Weight (without HDD)	≤ 8 kg (17.6 lb)		

Physical Interfaces

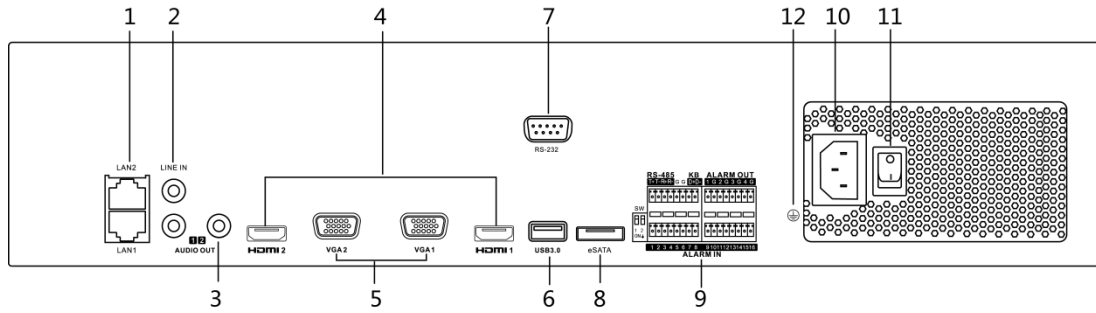

Index	Description	Index	Description
1	LAN1/LAN2 Interface	7	RS-232 Interface
2	LINE IN	8	eSATA Interface
3	AUDIO OUT	9	Alarm In/Alarm Out
4	HDMI1/HDMI2 Interface	10	100 to 240 VAC Power Supply
5	VGA1/VGA2 Interface	11	Power Switch
6	USB 3.0 Interface	12	GND

Available Models

NR710-32, NR710-64